

CARA 40

Attendance Machine




Product Specifications

Max User Capacity	5,000
Face Capacity	1,000
Fingerprint Capacity	5,000
Card Capacity	5,000
Password Capacity	5,000
Photo Capacity	10,000 (Enroll Photo + Attendance Photo)
Transaction Capacity	300,000
Language	English
Display	2.8 inch TFT (320*240)
Fingerprint Sensor	Optical sensor
Proximity Card	Standard for RFID(125KHz), optional for MIFARE
Communication	TCP/IP, WIFI(Optional)
U-Disk	Support
Bell	Built-in Timing Bell (Scheduled-bell)
Face Algorithm	Clotix Cara40
CPU	A33 processor, quad core, working frequency 1.2GHz.
Power management	Sleep Mode, Screen Saver, Timing Shutdown
Network Time Synchronization	Support
Power Supply	DC 12V/1A
Operating environment	Operating Temp: 0°C ~ +45°C, Humidity:20%-80%
Terminal Size	170(L)*160(W)*30(H)mm



Connectivity

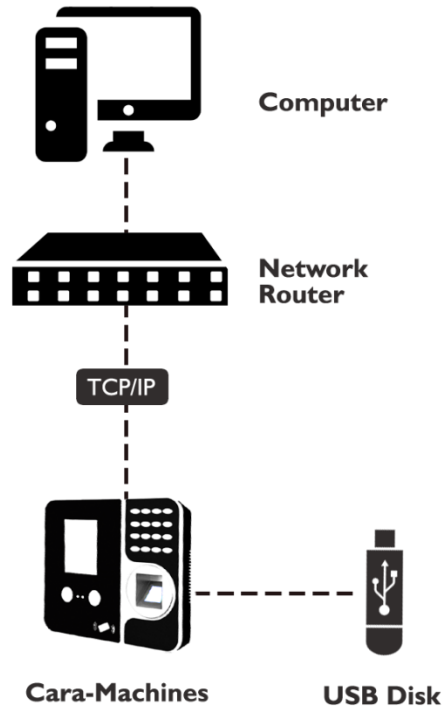

Support

For customer support you can contact us at: helpdesk@clotix.com

Product Verification

For product verification please visit at: www.clotix.com/product-verification

