

CARA 70

Multi-Verification Attendance Machine




Product Specifications

Max User Capacity	5,000
Face Capacity	1,500
Fingerprint Capacity	5,000
Transaction Capacity	500,000
Language	English
Display	4.3 inch TFT & Touch Screen
Fingerprint Sensor	Optical sensor
Proximity Card	Standard for RFID(125KHz), optional for MIFARE
Algorithm Version	Cara7000A
Communication	TCP/IP, WIFI
U-Disk	Support
Bell	Built-in Timing Bell (Scheduled-bell)
Doorbell	Support built-in doorbell
Access Control	Wigand input/output(26/34), exit button input, door sensor input, bell relay, door relay, tamper input,
Battery Backup(Optional)	Support (3 hours)
Face Algorithm	Clotix Cara V2.2
Fingerprint Algorithm	Clotix Dedo V3.0
Power management	Sleep mode
Power Supply	DC 12V/1.5A
Operating environment	Operating Temp: -10°C-60°C, Humidity:20%-80%
Terminal Size:	200(L)*165(W)*87(H)mm



Connectivity

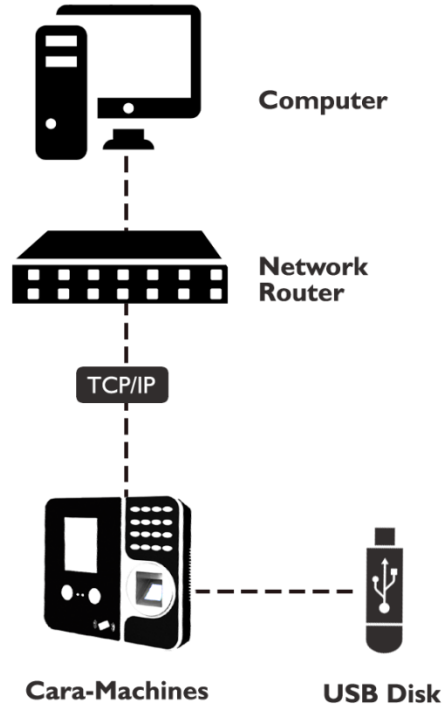

Support

For customer support you can contact us at: helpdesk@clotix.com

Product Verification

For product verification please visit at: www.clotix.com/product-verification

