

PB-115


SMART PARKING BARRIER



Specifications

Gate Opening/Closing Time	3s (max. 4.5m), 6s (max. 6m)
Supply Voltage	AC110V/220V, 50/60Hz
Power Consumption	100W (max. 120W)
Remote Controlling Distance	≤30m
Remote Controlling Frequency	430MHz
Cabinet Material	Cold rolled steel
Boom Material	Aluminum
Working Temperature Range	-25°C ~ +75°C
Working Humidity Range	≤90%
Housing Dimensions (D*W*H)	350 * 280 * 1010 (mm)
Packing Dimensions (D*W*H)	430 * 375 * 1100 (mm)
Net Weight	50kg
Gross Weight	52kg
Boom information	
Boom Type	Straight Telescopic Boom
Boom Weight	3.5kg(4.5m) ; 4.5kg(6m)
Boom Length	4.5m (packaging length 3.8m), 6m (packaging length 4.6m)

STRONG MECHANICAL STRUCTURE

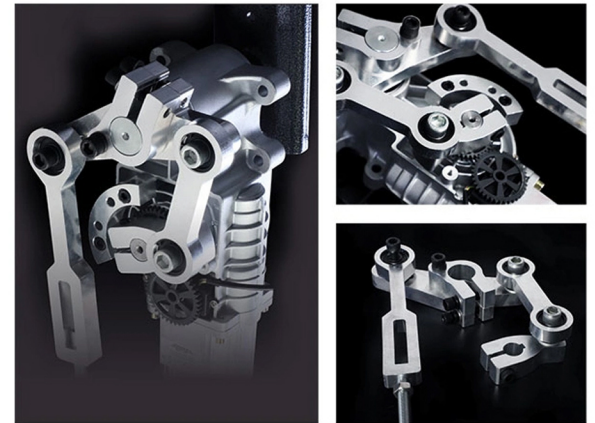

PARKING CONTROL SYSTEM

