




CLOTIX
www.clotix.net

CL280

Electro Magnetic Door Lock

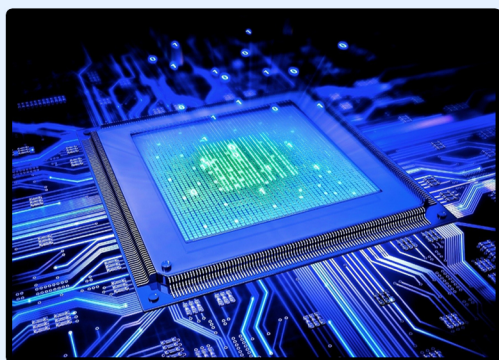

Features

The CL280 is a surface mounted magnetic lock series with 600 lbs holding force. LKM06L has dual voltage (12 or 24 VDC) and low current consumption with anodized aluminum housing.

CL280 has a built-in voltage spike suppressor and no residual magnetism. Monitored status output and timer versions are available.

Different types of bracket and housing are available to fit various mounting conditions.

Specifications

■ Voltage	Dual Voltage 12/24 VDC		
■ Current	12 VDC: 360 mA 24 VDC: 180 mA	12 VDC: 500 mA 24 VDC: 250 mA	12 VDC: 500 mA 24 VDC: 250 mA

MAGLOCK ENVIRONMENTAL SPECIFICATIONS

■ Operating Environment	Suitable for indoor use		
-------------------------	-------------------------	--	--

MAGLOCK PHYSICAL SPECIFICATIONS

■ Holding Force	136 kg (300 lb)	272 kg (600 lb)	544 kg (1200 lb)
■ Dimensions (L x W x D)	Main: 166 x 38.6 x 21.5 mm (6.54 x 1.52 x 0.85 in.) Contact: 129 x 31.5 x 7.5 mm (5.08 x 1.24 x 0.03 in.)	Main: 250 x 47.2 x 26.6 mm (9.84 x 1.86 x 1.05 in.) Contact: 185 x 37.5 x 11.5 mm (7.28 x 1.47 x 0.45 in.)	Main: 266 x 73 x 40 mm (10.5 x 2.87 x 1.57 in.) Contact: 184 x 60 x 16 mm (7.24 x 2.36 x 0.63 in.)
■ Weight	Main: 0.63 kg (1.39 lb) Contact: 0.25 kg (0.55 lb)	Main: 1.22 kg (2.7 lb) Contact: 0.66 kg (1.45 lb)	Main: 3.09 kg (6.8 lb) Contact: 1.39 kg (3.06 lb)



CLOTIX

Website : www.clotix.net

Email : contact@clotix.net

COPYRIGHT © 2023 CLOTIX CO. LIMITED ALL RIGHTS ARE RESERVED

