

# Dedo300

## Attendance Machine




### Product Specifications

<b>Max User Capacity</b>	<b>2,000</b>
<b>Fingerprint Capacity</b>	2,000
<b>Transaction Capacity</b>	100,000
<b>Language</b>	English, Spanish, German (available to customize others)
<b>Push Technology (UDP)</b>	Device Pushes real-time attendance record to the Software automatically, including the offline records.
<b>Display</b>	2.8 inch TFT Screen
<b>Fingerprint Sensor</b>	500DPI (Optical)
<b>Hardware Platform</b>	DedoDC2911
<b>Algorithm Version</b>	DedoDv5.1
<b>Communication</b>	TCP/IP, USB, USB Memory Disk
<b>Authentication Method</b>	Fingerprint/ RFID Card (125Khz)/Password
<b>Bell</b>	Built-in Timing Bell (Scheduled-bell)
<b>Option functions</b>	Simple access function (COM, NO, NC)
<b>Power Supply</b>	DC 12V/0.5A
<b>Operating environment</b>	Operating Temp: 0°C-50°C, Humidity: 80%
<b>Terminal Size:</b>	164(L)*110(W)*42(H)mm



# Connectivity

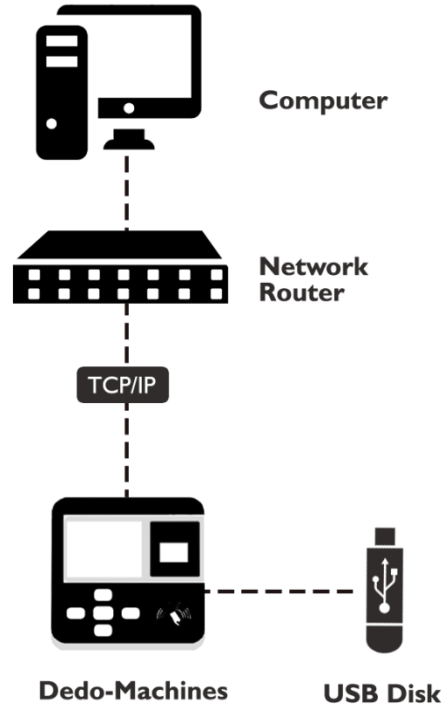

# Support

For customer support you can contact us at: [helpdesk@clotix.com](mailto:helpdesk@clotix.com)

# Product Verification

For product verification please visit at: [www.clotix.com/product-verification](http://www.clotix.com/product-verification)

