

Dedo40A

Time Attendance & Access Control Machine




Product Specifications

Max User Capacity	1,000
Fingerprint Capacity	1,000
Transaction Capacity	100,000
Language	English / Spanish/Portuguese/ German (could customize others)
Push Technology (UDP)	Device Pushes real-time attendance record to the RAMS Software automatically, including the offline records.
Display	2.4inch TFT Screen
Fingerprint Sensor	500DPI (Optical)
Hardware Platform	REALAND ZDC2911
Algorithm Version	REALAND RSFv5.1
Communication	TCP/IP, RS485, USB Memory Disk
Authentication Method	Fingerprint/ RFID Card (125Khz)/Password
Bell	Built-in Timing Bell (Scheduled-bell, can connect to external timing bell)
Access Control Interface	Wiegand26/34, Door Lock, Siren, Release Button, Doorbell, Door Sensor
Professional access function	Open door by multilevel verification, anti-pass back
Optional functions	Add to 2000/3000 templates, MIFARE CARD function
Power Supply	DC 12V/1A
Operating environment	Operating Temp: 0°C-50°C, Humidity: 80%
Terminal Size:	195(L)*80(W)*40(H)mm
Color for choose(Case)	Black, Silver



Connectivity

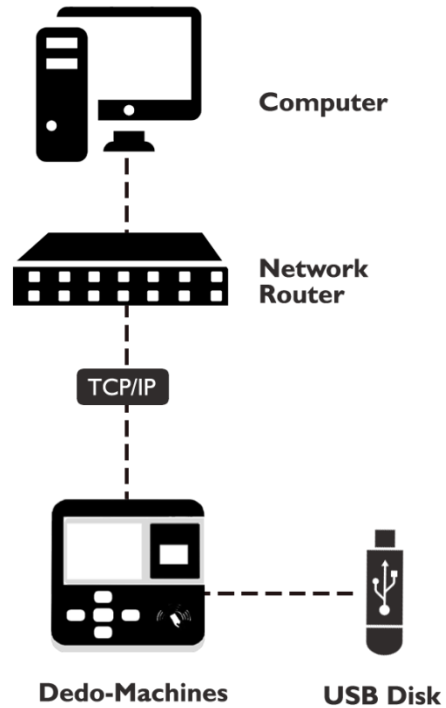

Support

For customer support you can contact us at: helpdesk@clotix.com

Product Verification

For product verification please visit at: www.clotix.com/product-verification

